

PLASTER BAND

SPECIAL HIGH-ADHESION TAPE, CAN BE ALSO PLASTERED

EXCELLENT ADHESION

Its excellent adhesion makes it ideal for application on most surfaces, even at low temperatures.

CAN BE PLASTERED

Technical fabric perfect to be subsequently plastered.

COMPOSITION

support
breathable 2-layer PP membrane


adhesive
acrylic dispersion without solvents

release liner
silicone coated paper



CODES AND DIMENSIONS



PLASTER BAND

CODE	liner	B	L	liner	B	L	
	[mm]	[mm]	[m]	[in]	[in]	[ft]	
PLASTER60	60	60	25	2.4	2.4	82	10

TECHNICAL DATA

Properties	standard	value	USC conversion
Total thickness	DIN 53855	0,6 mm	24 mil
Adhesion	EN 1939	35 N/25 mm	8 lbf/in
Water vapour transmission (Sd)	EN 1931	< 1 m	> 3.5 US perm
UV-resistant	-	4 months	-
Temperature resistance	-	-40 / +100 °C	-40 / +212 °F
Application temperature	-	> -10 °C	> +50 °F
Storage temperature	-	+15 / +25 °C	+59 / +77 °F

■ FIELDS OF APPLICATION

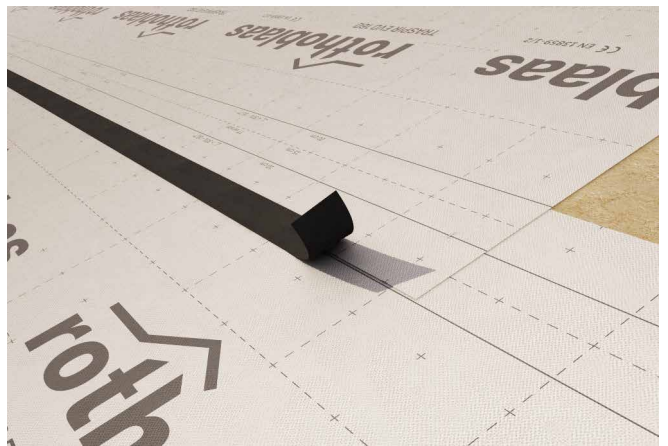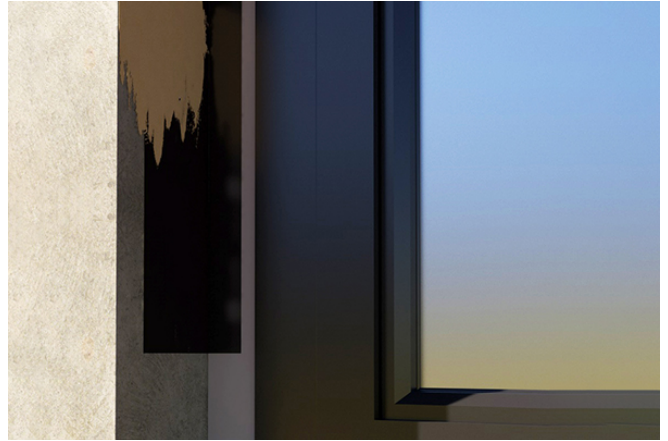


■ RELATED PRODUCTS



PRIMER SPRAY



PLASTER BAND IN



PLASTER BAND OUT



PLASTER BAND LITE



UNIVERSAL AND INVISIBLE

Excellent for sealing the membranes overlapping both inside and outside. Due to the black non-woven fabric support, it is not visible behind discontinuous cladding.

SAFE

Thanks to its special composition, it controls the flow of vapour perfectly and always guarantees a perfect air and wind tightness.