

I AOS

ANCHOR POINT

FUNCTIONAL

The 360° swivel eyelet allows the operator total freedom of movement.

COMPLETE

Supplied in a handy kit complete with bolts and washers for installation.

UNIVERSAL

The threaded rod available in various lengths allows the anchor to adapt to any type of timber, concrete and steel structure.



LOAD DIRECTION



TYPES OF APPLICATION




VIDEO



MANUALS





▼ AOS anchor points installed on a steel structure for securing an industrial environment.

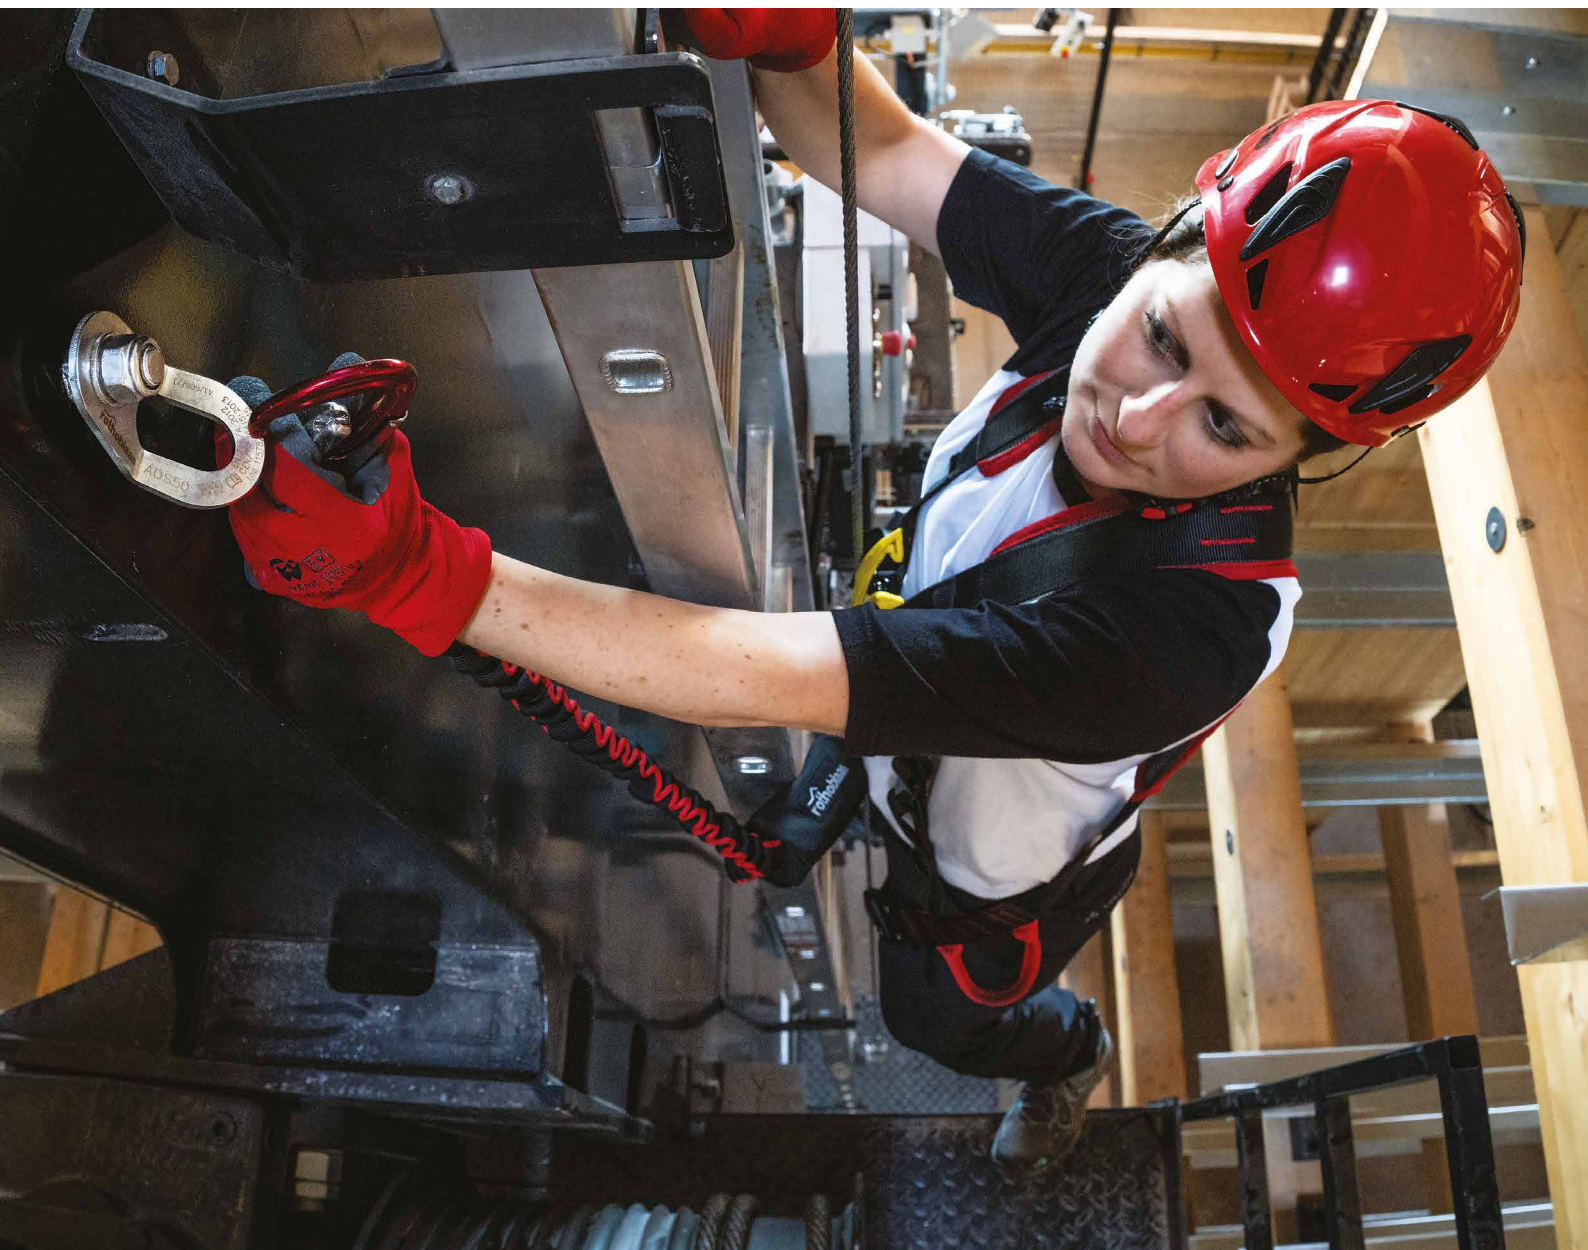

■ FIELDS OF APPLICATION

OMEGA + PALMIFIX

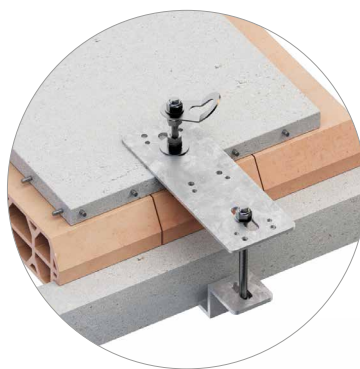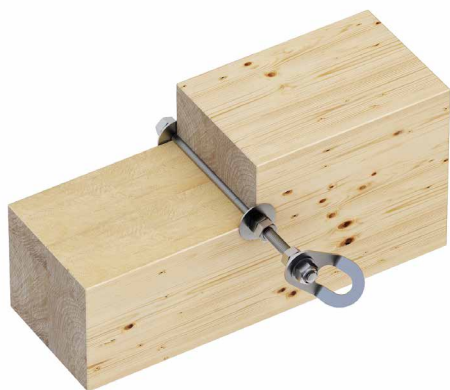

■ TECHNICAL DATA*


substructure	minimum thickness
GL24h	100 x 120 mm
S235JR	5 mm

substructure	minimum thickness	fasteners
C20/25	164 mm	VIN-FIX HYB-FIX

* The values indicated are the result of experimental tests carried out under the supervision of third parties in accordance with the standard referred to. For a calculation report with minimum distances according to the relevant standard requirements, the substructure must be checked by a qualified engineer before installation.

■ CODES AND DIMENSIONS

CODE	material	max. thickness of fixture [mm]	H [mm]	pcs
AOS50	AISI 304 stainless steel grade 1.4301	29	80	1
AOS130	AISI 304 stainless steel grade 1.4301	132	175	1
AOS200	AISI 304 stainless steel grade 1.4301	164	250	1
AOS300	AISI 304 stainless steel grade 1.4301	264	350	1
AOS400	AISI 304 stainless steel grade 1.4301	364	450	1
AOS500	AISI 304 stainless steel grade 1.4301	464	550	1



ACCESSORIES

CODE	material	page
OMEGA	accessory for PALMIFIX	230

CODE	material	page
PALMIFIX	fixed counterplate	230